


Data sheet

Order no. 745/5000

Tandem flatbed low loader, EC type approval

Weights:	Total weight of which drawbar load Payload in standard equipment approx. empty weight approx.	5000 kg 500 kg 3500 kg 1500 kg
Dimensions:	Loading dimension inside approx. (length x width) Dropside height approx. loading height unloaded approx. drawbar length approx. coupling height unloaded approx. overall dimensions length x width approx.	4000 x 2300 mm 400 mm 780 mm 1800 mm max. approx. 1020 mm 5980 x 2450 mm
Tyres:	Size	215 R 14 C 4-fold with valve sensors for TPMS

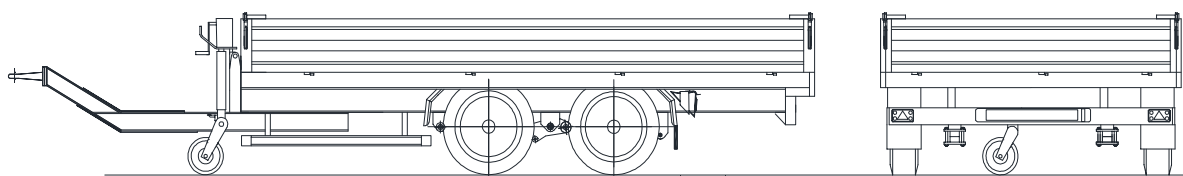

- Axles:** Knott high-speed axles with leaf spring unit, S-cam brake and load compensation
- Brake system:** EBS air brake system (multi-voltage with 24V plug-in connection in accordance with ISO 7638-01), test connections, connecting hoses with swap-proof coupling heads and **crank parking brake**
- Pulling device:** Drawbar made of hot-finished S355 grade hollow section, infinitely height-adjustable via spindle winch, with lorry DIN drawbar eye (40 mm), height adjustable from approx. 0.72 m to 1.02 m
- Chassis:** Robust welded construction made of sectional steel (including IPE profiles grade S355 and ULP profiles), electrically welded; side collision protection, reinforced underride guard in accordance with R58-03
- Structure:** Laser-welded steel drop sides; fixed front wall, side walls can be folded down and removed; rear drop side as tailgate; fixed corner posts; lashing brackets with 3000daN retractable into the side profile at intervals of approx. 0.60m; floor made of approx. 18mm thick screen printing plates
- Support:** Adjustable support wheel at the front
- Electrics:** Splash-proof lighting in accordance with ECE regulation ECE-R 48.06 (multi-chamber light, mounted in steel frame, **LED side marker**, clearance and license plate lights); 24 volt, 7+7 or 15-pin
- Paintwork:** Steel parts steel grit blasted, pre-treatment with iron phosphating; corrosion-inhibiting zinc phosphate primer, electrostatic painting in acrylic RAL colour (high-solid) as specified, followed by cavity sealing with preservative wax
- Accessories:** **Tyre pressure monitoring system (TPMS)**, 2 brake pads with holder; anti-spray mats, EC type approval; registration documents